



Radio Frequency Emissions Compliance Report for Verizon Wireless

Site Name:	HEYBOURNE	Site Structure Type:	Monopole
Address:	1450 Stephanie Way	Latitude:	39.042481
	Minden, NV 89423	Longitude:	-119.727945
Report Date:	September 20, 2023	Project:	New Build

Compliance Statement

Based on information provided by Verizon Wireless and predictive modeling, the HEYBOURNE installation proposed by Verizon Wireless will be compliant with Radiofrequency Radiation Exposure Limits of 47 C.F.R. §§ 1.1307(b)(3) and 1.1310. The proposed operation will not expose members of the General Public to hazardous levels of RF energy and will not contribute to existing cumulative MPE levels on walkable surfaces at ground or in adjacent structures by 5% of the General Population limits. As predicted RF power densities will not exceed the FCC General Population limits, no mitigation action other than restricting access to the tower is required to achieve or maintain compliance.

Certification

I, David Hamilton Kiser, am the reviewer and approver of this report and am fully aware of and familiar with the Rules and Regulations of both the Federal Communications Commissions (FCC) and the Occupational Safety and Health Administration (OSHA) with regard to Human Exposure to Radio Frequency Radiation, specifically in accordance with FCC's OET Bulletin 65. I have reviewed this Radio Frequency Exposure Assessment report and believe it to be both true and accurate to the best of my knowledge.

General Summary

The compliance framework is derived from the Federal Communications Commission (FCC) Rules and Regulations for preventing human exposure in excess of the applicable Maximum Permissible Exposure ("MPE") limits. At any location at this site, the power density resulting from each transmitter may be expressed as a percentage of the frequency-specific limits and added to determine if 100% of the exposure limit has been exceeded. The FCC Rules define two tiers of permissible exposure differentiated by the situation in which the exposure takes place and/or the status of the individuals who are subject to exposure. General Population / Uncontrolled exposure limits apply to those situations in which persons may not be aware of the presence of electromagnetic energy, where exposure is not employment-related, or where persons cannot exercise control over their exposure. Occupational / Controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment, have been made fully aware of the potential for exposure, and can exercise control over their exposure. Based on the criteria for these classifications, the FCC General Population limit is considered to be a level that is safe for continuous exposure time. The FCC General Population limit is 5 times more restrictive than the Occupational limits.

In situations where the predicted MPE exceeds the General Population threshold in an accessible area as a result of emissions from multiple transmitters, FCC licensees that contribute greater than 5% of the aggregate MPE share responsibility for mitigation.

Table 1: FCC Limits

Frequency (MHz)	Limits for General Population/ Uncontrolled Exposure		Limits for Occupational/ Controlled Exposure	
	Power Density (mW/cm ²)	Averaging Time (minutes)	Power Density (mW/cm ²)	Averaging Time (minutes)
30-300	0.2	30	1	6
300-1500	f/1500	30	f/300	6
1500-100,000	1.0	30	5.0	6

f=Frequency (MHz)

Based on the computational guidelines set forth in FCC OET Bulletin 65, Waterford Consultants, LLC has developed software to predict the overall Maximum Permissible Exposure possible at any location given the spatial orientation and operating parameters of multiple RF sources. The power density in the Far Field of an RF source is specified by OET-65 Equation 5 as follows:

$$S = \frac{EIRP}{4 \cdot \pi \cdot R^2} \text{ (mW/cm}^2\text{)}$$

where EIRP is the Effective Radiated Power relative to an isotropic antenna and R is the distance between the antenna and point of study. Additionally, consideration is given to the manufacturers' horizontal and vertical antenna patterns as well as radiation reflection. At any location, the predicted power density in the Far Field is the spatial average of points within a 0 to 6-foot vertical profile that a person would occupy. Near field power density is based on OET-65 Equation 20 stated as

$$S = \left(\frac{180}{\theta_{BW}} \right) \cdot \frac{100 \cdot P_{in}}{\pi \cdot R \cdot h} \text{ (mW/cm}^2\text{)}$$

where P_{in} is the power input to the antenna, θ_{BW} is the horizontal pattern beamwidth and h is the aperture length.

Some antennas employ beamforming technology where RF energy allocated to each customer device is dynamically directed toward their location. In the analysis presented herein, predicted exposure levels are based on all beams at full utilization (i.e. full power) simultaneously focused in any direction. As this condition is unlikely to occur, the actual power density levels at ground and at adjacent structures are expected to be less than the levels reported below. These theoretical results represent maximum-case predictions as all RF emitters are assumed to be operating at 100% duty cycle.

Analysis

Verizon Wireless proposes the following installation at this location:


- (16) (N) VERIZON WIRELESS ANTENNAS ON (N) MOUNTS
- (12) (N) RRH UNITS @ ANTENNAS

The antennas will be mounted on an 80-foot Monopole with centerlines 76 feet above ground level. Proposed antenna operating parameters are listed in Appendix A. Other appurtenances such as GPS antennas, RRUs and hybrid cable below the antennas are not sources of RF emissions. No other antennas are known to be operating in the vicinity of this site.



Figure 1: Antenna Locations

Power density decreases significantly with distance from any antenna. The panel-type antennas to be employed at this site are highly directional by design and the orientation in azimuth and mounting elevation, as documented, serves to reduce the potential to exceed MPE limits at any location other than directly in front of the antennas. For accessible areas at ground level, the maximum predicted power density level resulting from all Verizon Wireless operations is 2.52% of the FCC General Population limits. Incident at adjacent structures depicted in Figure 1, the maximum predicted power density level resulting from all Verizon Wireless operations is 0.96% of the FCC General Population limits. The proposed operation will not expose members of the General Public to hazardous levels of RF energy and will not contribute to existing cumulative MPE levels on walkable surfaces at ground or in adjacent structures by 5% of the General Population limits. As predicted RF power densities will not exceed the FCC General Population limits, no mitigation action other than restricting access to the tower is required to achieve or maintain compliance.

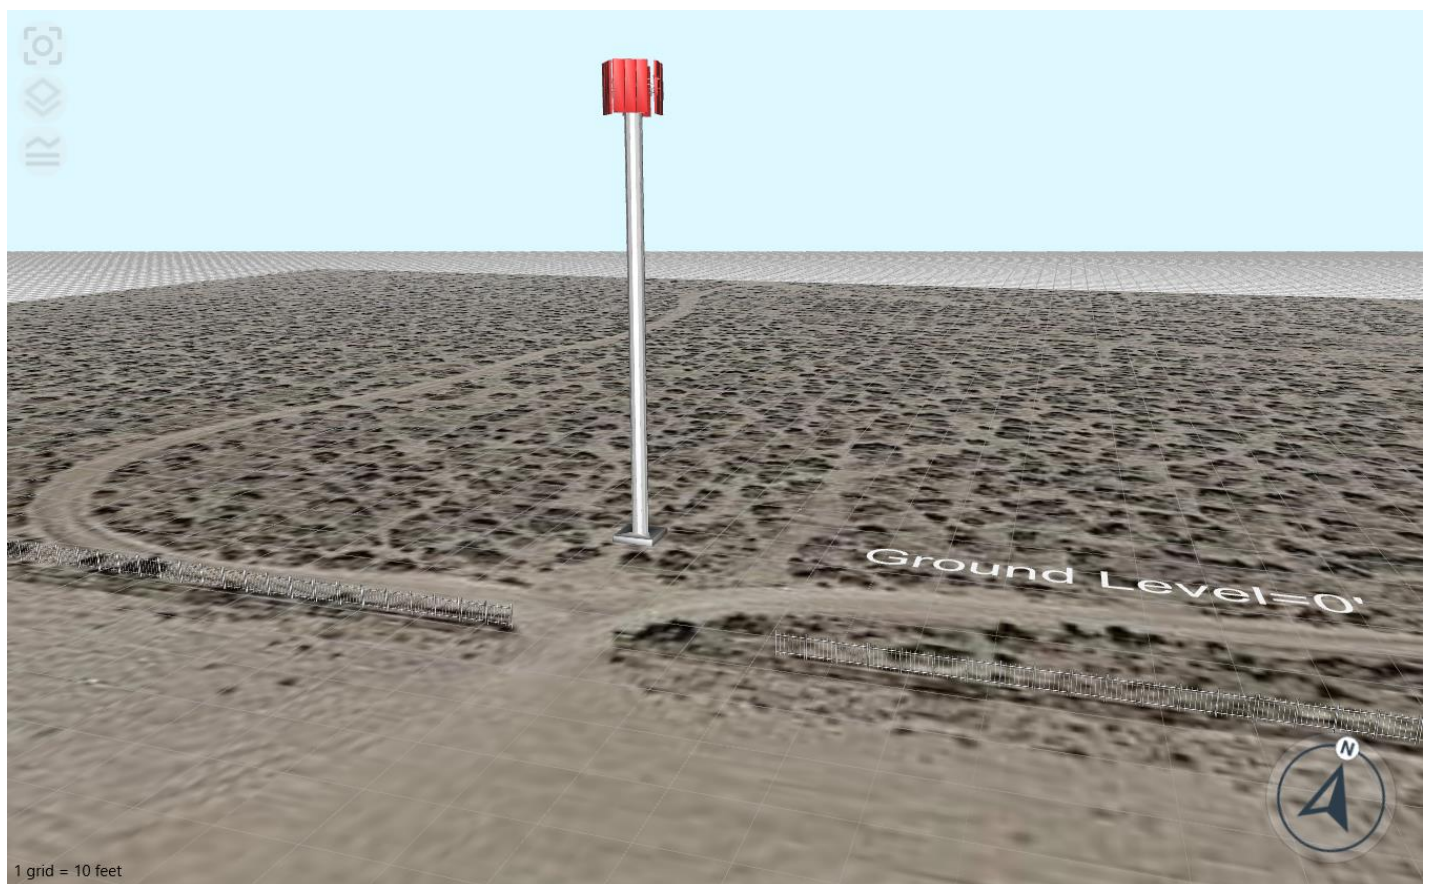

Appendix A: Operating Parameters Considered in this Analysis

Antenna #:	Carrier:	Manufacturer	Pattern:	Band (MHz):	Mech Az (deg):	Mech DT (deg):	H BW (deg):	Length (ft):	TPO (W):	Channels:	Loss (dB):	Gain (dBi):	ERP (W):	EIRP (W):	Rad Center (ft):
1	Verizon	ERICSSON	SON_AIR6449 NR TB 03.24.21 3700 VZW	3700	80	0	11	2.8	320	1	0	23.55	72469	118891	76
2	Verizon	JMA	MX06FRO840-02 02DT	700	80	0	40	8	60	2	0	15.4	4161	6826	76
2	Verizon	JMA	MX06FRO840-02 02DT	850	80	0	38	8	60	2	0	15.6	4357	7148	76
2	Verizon	JMA	MX06FRO840-02 00DT	1900	80	0	43	8	60	4	0	16.8	11487	18846	76
3	Verizon	JMA	MX06FRO840-02 02DT	700	80	0	40	8	60	2	0	15.4	4161	6826	76
3	Verizon	JMA	MX06FRO840-02 02DT	850	80	0	38	8	60	2	0	15.6	4357	7148	76
3	Verizon	JMA	MX06FRO840-02 00DT	2100	80	0	40	8	40	4	0	17.6	9207	15105	76
3	Verizon	JMA	MX06FRO840-02 00DT	2100	80	0	40	8	20	4	0	17.6	4604	7552	76
4	Verizon	JMA	MX06FRO840-02 02DT	850	80	0	38	8	0	0	0	15.6	0	0	76
5	Verizon	ERICSSON	SON_AIR6449 NR TB 03.24.21 3700 VZW	3700	155	0	11	2.8	320	1	0	23.55	72469	118891	76
6	Verizon	JMA	MX06FIT865-02 02DT	700	155	0	63	8	60	2	0	13.05	2422	3974	76
6	Verizon	JMA	MX06FIT865-02 02DT	850	155	0	57	8	60	2	0	13.35	2595	4258	76
6	Verizon	JMA	MX06FIT865-02 00DT	1900	155	0	65	8	60	4	0	15.05	7677	12595	76
7	Verizon	JMA	MX06FIT865-02 02DT	700	155	0	63	8	60	2	0	13.05	2422	3974	76
7	Verizon	JMA	MX06FIT865-02 02DT	850	155	0	57	8	60	2	0	13.35	2595	4258	76
7	Verizon	JMA	MX06FIT865-02 02DT	2100	155	0	56	8	40	4	0	15.55	5743	9421	76
7	Verizon	JMA	MX06FIT865-02 02DT	2100	155	0	56	8	20	4	0	15.55	2871	4711	76
8	Verizon	JMA	MX06FIT865-02 02DT	850	155	0	57	8	0	0	0	13.35	0	0	76
9	Verizon	ERICSSON	SON_AIR6449 NR TB 03.24.21 3700 VZW	3700	235	0	11	2.8	320	1	0	23.55	72469	118891	76
10	Verizon	JMA	MX06FRO840-02 02DT	700	235	0	40	8	60	2	0	15.4	4161	6826	76
10	Verizon	JMA	MX06FRO840-02 02DT	850	235	0	38	8	60	2	0	15.6	4357	7148	76
10	Verizon	JMA	MX06FRO840-02 00DT	1900	235	0	43	8	60	4	0	16.8	11487	18846	76
11	Verizon	JMA	MX06FRO840-02 02DT	700	235	0	40	8	60	2	0	15.4	4161	6826	76
11	Verizon	JMA	MX06FRO840-02 02DT	850	235	0	38	8	60	2	0	15.6	4357	7148	76
11	Verizon	JMA	MX06FRO840-02 00DT	2100	235	0	40	8	40	4	0	17.6	9207	15105	76
11	Verizon	JMA	MX06FRO840-02 00DT	2100	235	0	40	8	20	4	0	17.6	4604	7552	76
12	Verizon	JMA	MX06FRO840-02 02DT	850	235	0	38	8	0	0	0	15.6	0	0	76
13	Verizon	ERICSSON	SON_AIR6449 NR TB 03.24.21 3700 VZW	3700	300	0	11	2.8	320	1	0	23.55	72469	118891	76
14	Verizon	JMA	MX06FRO840-02 02DT	700	300	0	40	8	60	2	0	15.4	4161	6826	76
14	Verizon	JMA	MX06FRO840-02 02DT	850	300	0	38	8	60	2	0	15.6	4357	7148	76
14	Verizon	JMA	MX06FRO840-02 00DT	1900	300	0	43	8	60	4	0	16.8	11487	18846	76
15	Verizon	JMA	MX06FRO840-02 02DT	700	300	0	40	8	60	2	0	15.4	4161	6826	76
15	Verizon	JMA	MX06FRO840-02 02DT	850	300	0	38	8	60	2	0	15.6	4357	7148	76
15	Verizon	JMA	MX06FRO840-02 00DT	2100	300	0	40	8	40	4	0	17.6	9207	15105	76
15	Verizon	JMA	MX06FRO840-02 00DT	2100	300	0	40	8	20	4	0	17.6	4604	7552	76
16	Verizon	JMA	MX06FRO840-02 02DT	850	300	0	38	8	0	0	0	15.6	0	0	76

Notes: Table depicts recommended operating parameters for Verizon Wireless proposed operations.